


ANNN YANG

VARIABLE SPEED LATHE DY-410VS~510VS

BED WIDTH 305 & 330MM

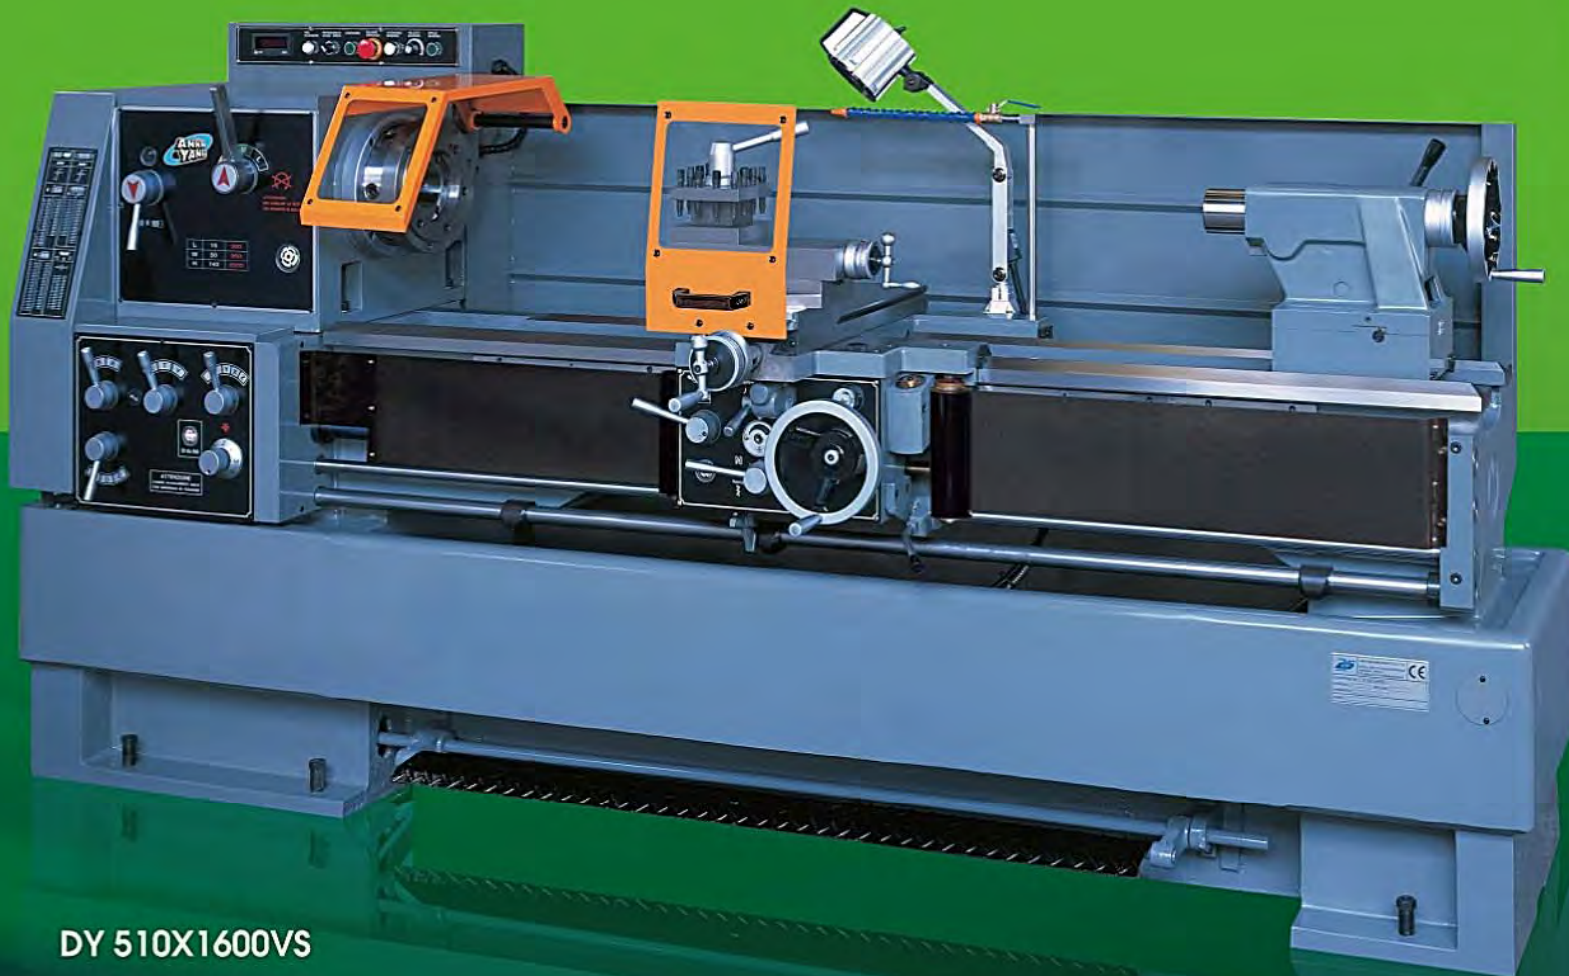

DY 410x1000VS



DY 510X1600VS

MODEL		DY-410VS	DY-510VS
Swing	Distance between centers	1000 / 1500mm	1100 / 1600 / 2100 / 3100 mm
	Swing over bed	410mm	510mm
	Swing over cross slide	230mm	320mm
	Swing over gap	640mm	760mm
	Height of center (over bed)	205mm	255mm
Bed	Bed Width	305mm	330mm
Headstock	Spindle nose & bore	D1-6 54mm	D1-8, 80mm
	Spindle speed (rpm)	L: 25~350 M: 70~1000 H: 180~2700	L: 15~300 M: 50~650 H: 140~2500
Feeds- Thread	Leadscrew	Ø35 mm, 4T.P.I. or 6 pitch	
	Number of feed changes	32	
	Longitudinal feed range	0.04~1.0 mm/rev	
	Cross feed range	0.02-0.5mm/rev	
	Inch threads	45 Kinds 2~72 T.P.I.	
	Metric threads	41 Kinds P0.2~14	
	D.P. No. / range	21 Kinds D.P 8~44	
	Module pitches No. / range	18 Kinds M 0.3~3.5	
Tool slide	Cross slide travel	240mm	260mm
	Compound rest travel	95mm	127mm
Tailstock	Quill travel	120mm	130mm
	Quill diameter	65mm	75mm
	Taper of center	MT#4	MT#5
Motor	Main motor	7.5hp / 10hp(opt.)	10hp / 12.5hp(opt.)
	Coolant pump	1/8HP	
Length (mm)		2400/2900mm	2470/2970/3470mm
Width (mm)		1100	1100
Height (mm)		1800	1880
N.W. (kg)		1700/2000 kgs	2000/2300/2800/3600 kgs