


STANDARD-MODERN / ANILAM 1200T

C N C LATHE

CONSTANT SURFACE SPEED

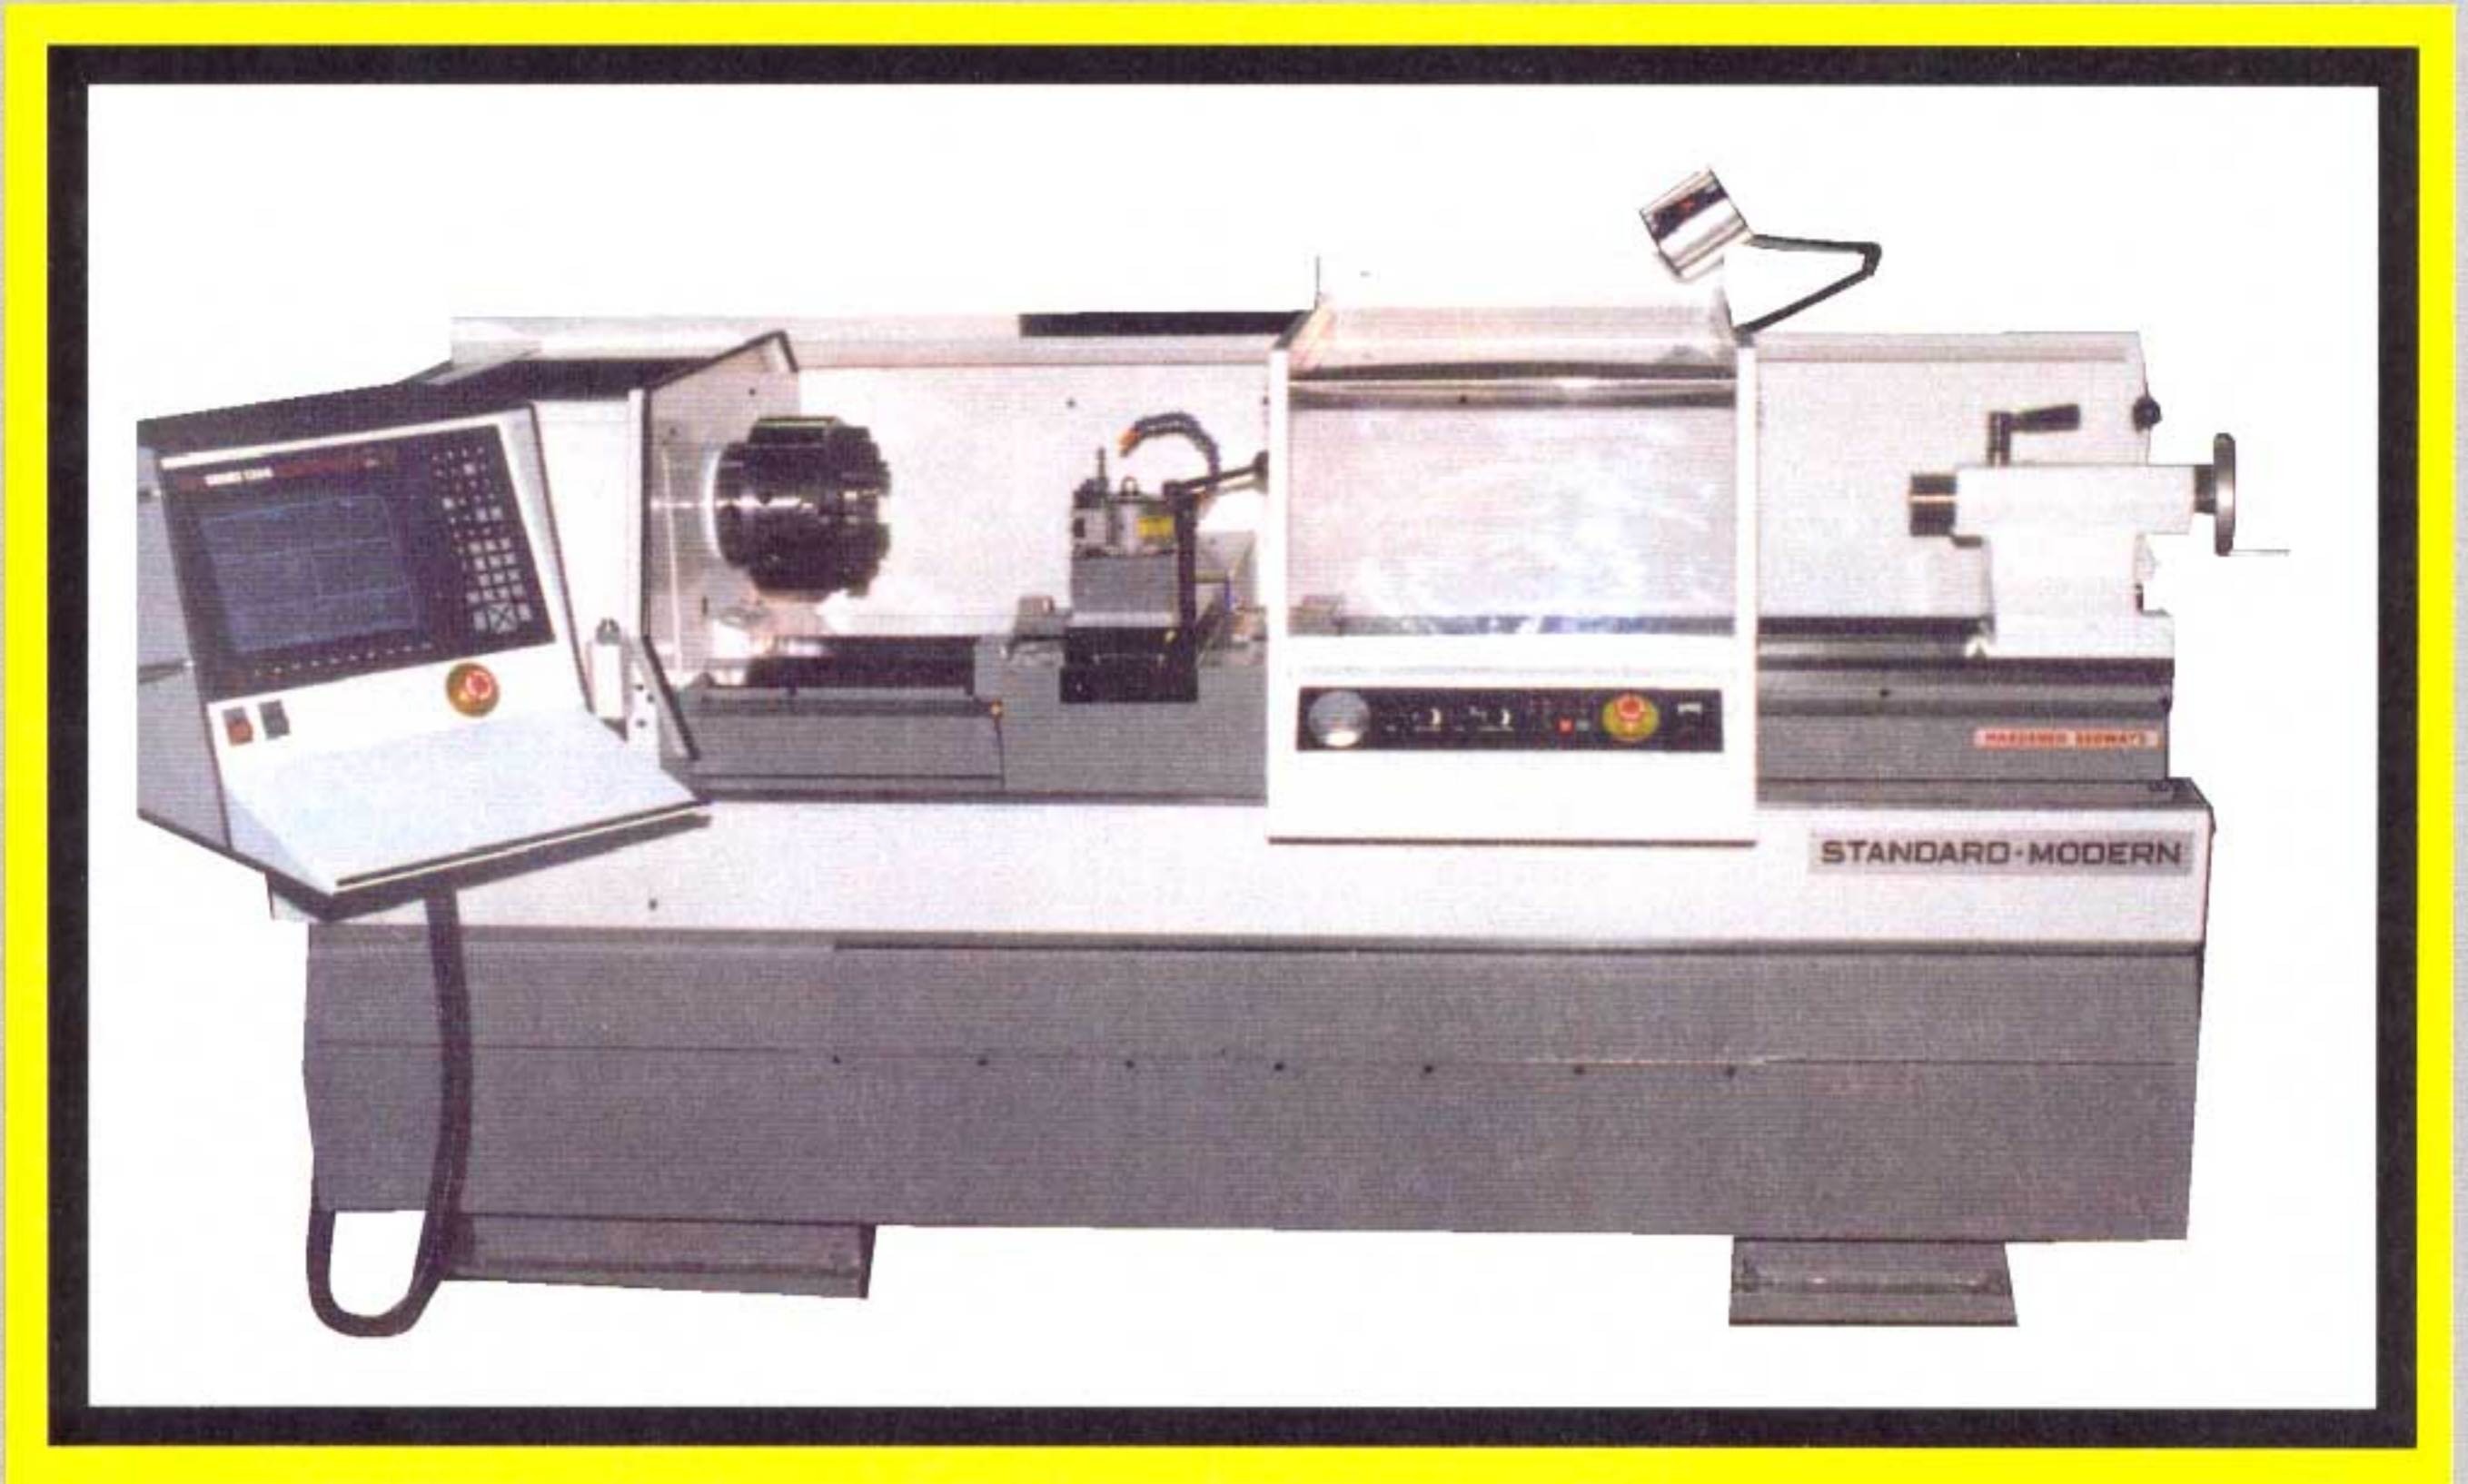

MACHINE DESCRIPTION AND SPECIFICATIONS:

- Stable Deep Bed Design
- Hardened Mehanite Casting
- Turcite Slideways
- Constant Surface Speed Control
- Three Speed Ranges
- Brushless A C Servos
- A C Vari-speed Spindle Motor
- High Torque

Standard-Modern lathe
Anilam Control
C S M Motors

H H Roberts Machinery Manufacturing.
Mississauga, Ontario, Canada

Standard-Modern/Anilam CNC Lathe

Description	14"	17"	20"
Swing Over Bed	14"	17"	20"
Swing Over Crossslide	9"	10"	12"
Between Centers	40"	40 - 60 - 100"	40 - 60 - 80 - 120"
Spindle Nose	D1-5	D1-6	D1-8
Spindle Bore (Opt)	1.56" (2")	2.06" (3")	3.06" (4" & Up)
Spindle Motor (Opt)	5 HP. (7.5)	10 HP. (15)	20 HP. (25)
X Axis Travel	7"	8.5"	12"
Z Axis Travel	36"	36, 56, 96"	36, 56, 76, 116"
Spindle Speed (Variable)	0-3000 RPM	0-2700 RPM	0-2500 RPM
Rapid Feed Rate	250"/min.	250"/min	250"/min
Tailstock Quill Dia.	1.562"	2.875"	2.940"
Quill Taper	3 MT	4 MT	5 MT
Quill Stroke	4"	4"	7"

Standard Equipment

3 Jaw chuck
 Aloris Quick Change Toolpost
 Coolant System
 220v Or 440v Electrics
 Sliding Chip Guard
 Central Lube System
 Automatic Headstock Lube
 Load Meter
 Levelling Pads
 Manual

Optional Features

Larger Spindle Bores On All Models
 Larger Spindle Motors On All Models
 Front Mounted Air Chucks
 Hydraulic Chucks
 Auto Indexing Turrets